

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/29436 A1

(51) International Patent Classification⁷: **G01S 17/89**,
7/486

(21) International Application Number: PCT/GB01/04375

(22) International Filing Date: 1 October 2001 (01.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0024587.8 5 October 2000 (05.10.2000) GB

(71) Applicant (for all designated States except US): **MBDA UK LIMITED** [GB/GB]; Six Hills Way, Stevenage, Hertfordshire SG1 2DA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JENNINGS, Martyn, Robert** [GB/GB]; 26 Wheatfield Drive, Bradley Stoke, Bristol BS32 9DP (GB). **MILLER, Lee, Douglas** [GB/GB]; 7 Heron Gardens, Portishead, North Somerset BS20 7DII (GB).

(74) Agent: **FLETCHER WATTS, Susan, Jane**; BAE Systems plc, Group IP Department, Lancaster House, P.O. Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PULSE SHIMTED ARRAY

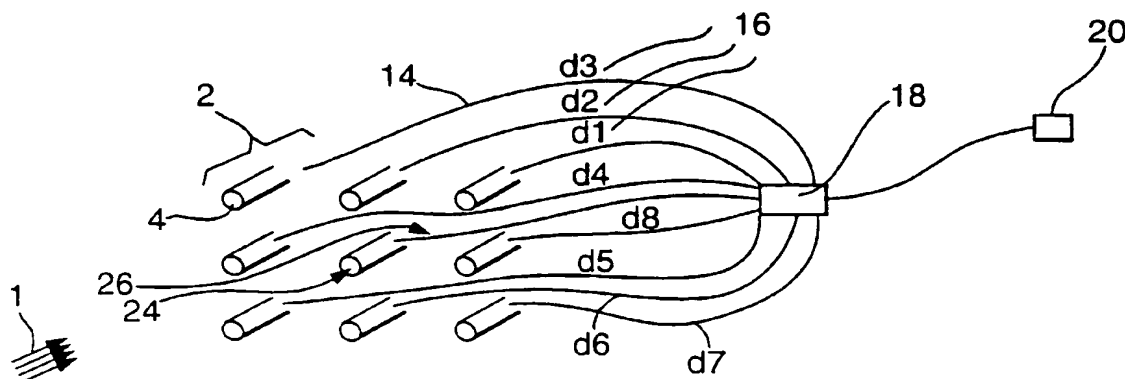

(57) Abstract: A laser-radar receiver comprising an array of optical fibres, wherein the opposite ends of the optical fibres are connected to at least one electromagnetic radiation detector, each of the optical fibres having differing physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation.

WO 02/29436 A1

PULSE SHIFTED ARRAY

This invention relates to the field of laser-radar imaging and related sensor technology.

Conventional active laser-radar imaging systems provide an array of
5 sensor elements which combine optically to capture an image of a body or target. The use of an active or pulsed light source such as a laser to illuminate the body or target generally provides an improved optical return, thereby allowing a three dimensional image of a scene to be captured. Such images comprise information relating to azimuth, elevation and range.

10 Where a laser is used as the active or pulsed light source to produce the required optical returns, it is advantageous to utilise short duration laser pulses in order to help reduce the energy levels required by the sensor systems. The use of such lasers helps achieve a greater range resolution.

Conventional sensor array detector elements used with active or pulsed
15 light sources often have relatively long time constants which require shorter duration pulses to be integrated into longer pulses. This can lead to a reduction in the range resolution of the system as a whole. The use of active pulse light sources as a means of achieving greater range resolution has been made possible by the use of Q-switching, whereby laser sources can achieve
20 nanosecond pulse durations. To help overcome the integration problems associated with conventional array detector elements, Avalanche Photo-Diodes (APD's) have been used. APDs can readily perform the required optical detection and processing of short duration pulses, but problems still exist in relation to the fabrication of APDs into arrays.

- 2 -

- In a paper number #3065-04 presented at the SPIE AeroSense meeting (April 20th – 25th 1997, Orlando, Florida), a prototype active imaging laser-radar receiver was presented. The receiver incorporated an array of fibre coupled multi-channel receivers enables it to acquire images from a single laser pulse.
- 5 Conventional scanned laser-radar imaging receivers require multiple pulses to assemble full images and suffer from jitter and image tearing caused by platform or target instability and other environmental effects. The paper proposed the use of a single pulse approach thereby eliminating distortions and providing high quality, high speed range based images.
- 10 The receiver as presented in the paper consisted of a focal plane array, formed of end polished multi-mode fibres. Each fibre acts as a light bucket, thereby capturing optical signals and relaying said signals to a series of detector elements. An array of APDs (APDs) was then utilised to detect and process light captured by the pixels formed by each end polished fibre-optic.
- 15 The configuration of the imaging laser-radar receiver as presented in the above referenced paper, requires that each pixel in the fibre-optic array has an associated APD detector. It therefore follows that, for example, a 24 x 24 array of pixel elements would require a total of 576 APD detector and processing elements. This makes any such a receiver comparatively large, and expensive
- 20 in terms of the number of APDs and the associated electronics. In addition to the physical size and cost of developing such a system, the APD detection and processing electronics will remain largely dormant when a typical pulse repetition rate of 1 kHz is used. This follows because the detector is required to

respond to pulses of a few nanoseconds duration, thereafter lying dormant for the remainder of the one millisecond pulse duration.

The invention provides for an imaging laser-radar receiver which requires substantially fewer detectors (and associated processing electronics) by utilising
5 fibre-optic delay lines to supply time shifted pulses into each detector. The reduction in the number of detectors can provide for a physically smaller and more compact receiver system along with a corresponding reduction in the costs associated with the number of APDs required. Additionally, the invention provides flexibility in relation to the physical location of both detectors and
10 associated electronics, thereby providing for further benefits in terms of packaging volume and the use of otherwise redundant space in host containers and vehicles.

Accordingly there is provided a laser-radar receiver comprising an array comprised of the first ends of a plurality of optical fibres, wherein the
15 corresponding opposite ends of said optical fibres are connected to at least one electromagnetic radiation detector means, each of said optical fibres having differing physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation incident on said first ends of said optical fibres to said at least one electromagnetic detector means.

20 The invention will now be described by way of example only with reference to the following drawings in which;

Figure 1 shows a diagrammatic representation of a state of the art imaging laser-radar receiver.

Figure 2 shows a diagrammatic representation of an imaging laser-radar receiver in accordance with a first embodiment of the invention.

Figure 3 shows a diagrammatic representation of an imaging laser-radar receiver which is a variant of that shown in Figure 2.

5 Figures 4a and 4b show a pulse train received by the apparatus of Figures 2 and 3 respectively.

Figure 5 shows an imaging laser-radar receiver in accordance with a second embodiment of the invention.

Figure 1 shows an array of nine fibre-optic cable end faces (pixels) 4
10 each having a fibre-optic cable transmission path 6 for carrying optical signals to a corresponding array of APD's 8. When a light source 1 is incident on the array of pixels 2, each fibre acts as a light bucket, capturing the optical signal 1 and relaying it via the fibre-optic transmission line 6 to the dedicated APD 8 for each cable. Each APD 8 provides the means for optical detection and
15 processing of the light source 1, each having a corresponding output transmission line 9 for supplying the light information on to a further processing means 10 via input terminals 12. The further processing means 10 is then utilised to construct a three-dimensional image of the body illuminated by the light source. Each of the fibre-optic transmission lines 6 are of substantially
20 equal length, thereby providing all light source information 1 falling on any of the pixels 4 in phase to the APD's 8.

Figure 2 shows an imaging laser-radar receiver in accordance with the invention having an identical number of pixels 4 to that described in the

example shown in figure 1, but distinguished therefrom in that each of said fibre-optic transmission cables 14 carry light source information 1 to a single APD 18. The invention utilises delays 16 in the fibre-optic transmission lines 14 to provide time shifted pulses to the APD 18. In the 3 x 3 "cluster" of pixels shown in figure 2, all nine pixels feed one APD 18. The centre pixel 24 has the shortest fibre-optic transmission cable 26 for transmitting light source information 1 to the APD 18. Each of the remaining surrounding pixels are connected to the APD 18 by fibre-optic transmission lines 14, each having corresponding delays 16, each delay (d1, d2, d3 ... d8) being different and each delay being provided in this example by a different length of fibre. This arrangement provides for the light source data 1 from the nine pixels to be multiplexed into the APD 18.

The selection of the centre pixel as that being the pixel having the shortest transmission path to the APD is for purposes of example only and is not intended to represent a limiting feature of the invention. Accordingly in an array, any one pixel could equally be selected to be that with the shortest time transmission path.

When comparing the system described in figure 1 with that of figure 2, it is apparent that in the 3x3 example in figure 2 provides for an arrangement which requires eight less APDs in order to provide the same light source data 1 to an APD for onward processing by the processor unit 20. This principle can be scaled to suit various arrays of pixels retaining the same benefits. For example in a 5x5 array it would be possible to utilise one centre pixel surrounded by twenty four further pixels, each utilising delays 16 in their

respective optical transmission lines. When compared with a state of the art 5x5 array system following the teaching described in figure 1, a comparable system in accordance with the invention as described by figure 2 would use twenty four fewer APD elements.

5 An example of typical values used to explain the invention shown at in figure 2 now follows. In a 3 x 3 array it will be assumed that the delay lines 16 have lengths which are integer values (e.g. 40m, 80m, 120m, 160m). Light source information 1 travelling through a 40m fibre having a refractive index of 1.5 will take 200ns to travel from the pixel to the APD 18. The first pulse from
10 the array will be from the centre pixel, unless an adjacent pixel is imaging an object which is more than 30m (i.e. $40 \times 1.5 \div 2$) closer than the master pixel. This condition is known as a "range ambiguity" and is a consequence of using the pulse shifted array approach of the invention. In the unlikely event that such an ambiguity occurs, the processing unit 20 would detect not one, but two
15 pulses in a 200ns period thereby indicating that a range ambiguity problem or "false alarm" is present.

Another type of range ambiguity occurs when not all of the pixels in the array capture an optical signal. This may occur for example, when the array is directed towards the edge of the body or target and not all of the pixels receive
20 a reflected pulse.

Assuming that no range ambiguities exist in the example, the APD 18 will see the pulse from the centre pixel followed by eight sequential pulse from the surrounding pixels. Each pulse will occur at or about 200ns intervals depending on the physical relationship between the plane of the array of pixels and the

angle to the light source. Hence, the train of nine pulses will have been detected within about $1.6 \mu\text{s}$ (i.e. $8 \times 200\text{ns}$). Assuming a typical imaging at frame rate of 1kHz it will be evident that many more surrounding pixel pulses could be detected in the example given above, where a 1 kHz repetition rate
5 implies a window of 1 millisecond ($1000\mu\text{s}$). The range to an object, regardless of whether it is the centre or a surrounding pixel can therefore be determined for each pixel and a 3 dimensional image of the illuminated object constructed.

A further aspect to be taken into account when considering the example in figure 2, is the total length of fibre-optic cable required. In the example the
10 first surrounding pixel has an associated 40m fibre, and the last (i.e. 8th) has a 320m fibre. The length of fibre required for each 3x3 array using the invention as described in accordance with figure 2 is 1.44 km. If this figure is now applied to a scaled up and representative array size of 24x24 pixels, then utilising one APD per nine pixels results in a requirement for sixty four 3x3 arrangements.
15 Accordingly, the total length of fibre-optic cable required for a 24x24 pixel array would equal 92 km. Using fibres with an outside diameter of $100\mu\text{m}$ and assuming a packing density of 78% (i.e. $\pi/4$), this would result in a fibre-optic volume requirement of 900cc.

This volume can be further reduced by a factor of four if $50 \mu\text{m}$ diameter
20 fibre was utilised. Further reductions in the fibre volume requirement could also be achieved by the use of mirrored end fibres to produce 2-pass 'stub' delay lines. The introduction of such 2-pass stub delay lines could effectively halve the physical length of the fibre transmission lines 14.

If a range ambiguity such as those described above does exist, this may be addressed by using a known range finder in conjunction with the apparatus according to the present invention. Alternatively, the apparatus may be adapted to eliminate range ambiguities. This might be done by identifying
5 which pixel transmits which signal to the ADP. This could be done in a variety of different ways, including that described below with respect to Figure 3.

Figure 3 shows an imaging laser-radar receiver similar to that of Figure 2, but only the fibre-optic transmission cables 14 from three of the pixels are shown for reasons of clarity. Each pixel has a fibre-optic cable 14 for carrying
10 light source information to a single APD 18. Each of the fibre-optic transmission cables 14 are of a different length as described with respect of Figure 2, but differ from those shown in Figure 2 in that they each have an alternative path 14a. Thus light travelling along a fibre-optic transmission cable 14 arrives at a junction, and can either travel along the original fibre-optic
15 transmission cable 14 or can travel along the alternative path 14a. The alternative path is a fibre-optic transmission cable having the same or similar characteristics to the original fibre-optic transmission cable 14. The alternative path 14a joins up with the original fibre-optic transmission cable 14 prior to arrival at the APD18. The alternative path 14a is of a different length to the
20 corresponding portion 14b of the original fibre-optic transmission cable 14. Thus light which travels along the longer path (in this example 14a, although the alternative path could instead be adapted to be shorter than the original one) arrives at the APD 18 later than the light which travels along the shorter path (in this example 14b), the difference being Δd . The difference in arrival times Δd

of the two light pulses from any one pixel at the APD 18 is preferably very small in comparison to the difference in arrival times of light pulses from the different pixels. (e.g. the difference between d1 and d8). Each pixel has an alternate path of different length from those of other pixels, so that the difference Δd is
5 different for the two light pulses being carried from each of the pixels. This allows the processor unit 20 to identify which pixel received the reflected light.

Figures 4a and 4b help to explain how range ambiguities can be eliminated using the apparatus described with respect to figure 3. The range is a function of the time taken for the light pulse to travel to the body or target and
10 back plus the time for the light pulse to travel along the fibre-optic transmission cable 14.

The pulse train 50 is that which might be received by the APD 18 when the apparatus of Figure 2 is used. Time T_0 is the time at which the first light source data 1 is received by a pixel. The delay in the signals reaching the ADP
15 is different for each pixel due to the difference in cable length.

Assuming that light is received by the other pixels at virtually the same time, and that no range ambiguities exist, the pulse train 50 would occur. Any range ambiguity would result in the pulses either being in a different order than expected, or in fewer than a full set of pulses (in this example nine) being
20 received, and the processor will not know which pixels received the light source data and therefore the processor will not know the cable length for those pixels and hence the range of the object.

If the apparatus of Figure 3 is employed in the same situation, then the resulting pulse train 52 would occur. The difference between signals received

- 10 -

from one pixel Δd is different for each pixel (Δd_1 , Δd_2 , etc.) and so each pixel receiving light source data can be identified by the processor. Any range ambiguity resulting in fewer than a full set of pulses being received would not hamper range calculations, as the processor is able to identify the pixel receiving the light source data, and therefore the processor will know the cable length of the pixel and the range of the object can be calculated.

Instead of using different lengths of fibre-optic cable for the alternative paths 14a, cables 14a having different characteristics could be used instead for each pixel.

It can be seen that the range ambiguity issue can be addressed in a variety of different ways.

Figure 5 shows a second embodiment of the invention wherein a different arrangement of fibre-optic delay lines 30, 32 ... is provided. A pixel 24 hereinafter referred to as a 'master' pixel is connected to an APD 18 via fibre-optic transmission line 28 in a similar manner to that described in figure 2. The delay line 30 emanating from 'slave' pixel f1 is connected into the delay line 28 of the master pixel 24. Each of the remaining 'slave' pixels f2, f3, ..., f8 are similarly connected in series, with delay line 32 from pixel f2 being connected into the delay line 30 of fibre-optic f1, and onwards into optical fibre transmission line 28. The sequence of connecting the fibre-optic delay line from each associated pixel into its neighbour provides for a delay line structure where for example light signals incident on pixel f8 travel through fibre-optic delay line 44, on through fibre-optic delay line 42 associated with pixel f7, and similarly on through fibre-optic delay line 40 associated with pixel f6 until the

signal is finally transmitted to the APD 18 via the master pixel optical fibre transmission line 28.

It will be evident that using the 'in series' delay line arrangement of figure 5 results in a time-shift effect for the slave pulses which are ultimately transmitted to the APD 18. Greater connection and interface losses will be expected with signals from the higher order slave pixels, along with ghost pulses due to multiple reflections along the length of the delay line fibres.

When comparing the length of fibre required to effect a 24x24 pixel array using the 'in series' arrangement, it follows that sixty four APD detector elements, each having eight x 40 metres of fibre-optic transmission cable, results in an overall fibre length requirement of 20.5 km. When based on a fibre outside diameter and a packing density identical to that used in the example given in the embodiment described in figure 2, (i.e. 100µm OD fibre and $\pi/4$ packing density) this corresponds to a fibre packing volume of 200 cc.

Alternative methods by which the delay may be introduced into the optical transmission lines of any of the laser-radar receivers described above in accordance with the present invention also include, but are not limited to, variations in the refractive index of the optical fibre material, and the use of optical fibres of differing materials.

Additionally, the cut ends 4 of the optical fibres 2 could be coated or covered with or by materials which act as filters, such as but not limited to band pass, high pass or low bass filters, thereby providing for the system to be designed to be responsive to particular ranges of electromagnetic energy wavelengths.

The invention as described above could alternatively comprise a focal plane array assembly.

The examples as described herein relate to arrays of pixel elements formed into regular square elements (i.e. 3x3, 4x4, 5x5 etc.). This feature should not be construed as limiting the invention to array patterns of regular shapes. Arrays in accordance with the invention may comprise pixels formed into regular or irregular or random layouts, be they planar or non-planar (i.e. 2 or 3 dimensional). Arrays may also be conformal, in that their application is such that they are required to be integrated into the outer surface such of a vehicle or body.

Additionally, the array size is not limited to one cluster of pixels. Any number of clusters may be combined to produce an overall array in accordance with the invention. Larger arrays may comprise clusters of pixels of any of the forms described by figures 1, 2 or 3, or in any combination thereof.

Although short duration discrete pulses are preferable, it is possible to receive pulses of longer duration, such as pulses which have a duration longer than the inter-pulse spacing. In this case, the APD would experience a current which exhibited a step increase each time the APD received an optical signal from a pixel.

The quality of information obtained from utilising the present invention can be tailored for individual applications, by adjustment to the number of pulses within a given time period, and the duration of those pulses.

CLAIMS

- 1 A laser-radar receiver comprising an array comprised of the first ends of
a plurality of optical fibres, wherein the corresponding opposite ends of
5 said optical fibres are connected to at least one electromagnetic radiation
detector means, each of said optical fibres having differing physical
characteristics which result in known delays in the transmission time of
pulsed electromagnetic radiation incident on said first ends of said optical
fibres to said at least one electromagnetic detector means.
- 10
- 2 A laser-radar receiver in accordance with claim 1, wherein each of said
corresponding opposite ends of said optical fibres is directly connected to
the same electromagnetic radiation detector means.
- 15 3 A laser-radar receiver in accordance with claim 1, wherein the
corresponding opposite ends of said optical fibres are connected in
series to the first ends of adjacent optical fibres, the final opposite end of
the last optical fibre in the series being connected to an electromagnetic
radiation detector means.
- 20
- 4 A laser-radar receiver in accordance with claim 1 or claim 2 wherein
each of said optical fibres is adapted to present, along at least a part of
its length, a choice of at least a first path or a second path for the pulsed

electromagnetic radiation, the first path having different physical characteristics from the second path.

5 A laser-radar receiver in accordance with claim 4 wherein each of said
5 first paths have different physical characteristics from each other and
wherein each of said second paths have different physical characteristics
from each other.

6 A laser-radar receiver in accordance with any of claims 1 to 5 wherein
10 said physical characteristics include fibre length.

7 A laser-radar receiver in accordance with any of claims 1 to 5 wherein
said physical characteristics include fibre refractive index.

15 8 A laser-radar receiver in accordance with any of claims 1 to 5 wherein
said physical characteristics include fibre material.

9 A laser-radar receiver in accordance with any of claims 1 to 8 wherein
said array forms a conformal array.

20

10 A laser-radar receiver in accordance with any of claims 1 to 8 wherein
said array forms array forms a focal plane array.

11 A laser-radar receiver in accordance with any of claims 1 to 10 wherein
25 said first ends of said optical fibres comprise means for selectively

- 15 -

filtering the wavelength of laser energy transmitted to the detector means.

- 12 A laser-radar receiver in accordance with claims 1 to 11 wherein said
5 array comprises a plurality of smaller individual arrays.

AMENDED CLAIMS

[received by the International Bureau on 08 March 2002 (08.03.02);
original claims 1-12 replaced by new claims 1-11 (3 pages)]

1. A laser-radar receiver comprising an array comprised of the first ends of a plurality of optical fibres, wherein the corresponding opposite ends of said optical fibres are connected to at least one electromagnetic radiation detector means, each of said optical fibres having differing physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation incident on said first ends of said optical fibres to said at least one electromagnetic detector means, wherein each of said optical fibres is adapted to present, along at least a part of its length, a choice of at least a first path or a second path for the pulsed electromagnetic radiation, the first path having different physical characteristics from the second path.
2. A laser-radar receiver in accordance with claim 1, wherein each of said corresponding opposite ends of said optical fibres is directly connected to the same electromagnetic radiation detector means.
3. A laser-radar receiver in accordance with claim 1 or claim 2 wherein each of said first paths have different physical characteristics from each other and wherein each of said second paths have different physical characteristics from each other.

4. A laser-radar receiver in accordance with any of claims 1 to 3 wherein said physical characteristics include fibre length.
5. A laser-radar receiver in accordance with any of claims 1 to 3 wherein said
5 physical characteristics include fibre refractive index.
6. A laser-radar receiver in accordance with any of claims 1 to 3 wherein said physical characteristics include fibre material.
- 10 7. A laser-radar receiver comprising an array comprised of the first ends of a plurality of optical fibres, wherein the corresponding opposite ends of said optical fibres are connected in series to the first ends of adjacent optical fibres, the final opposite end of the last optical fibre in the series being connected to an electromagnetic radiation detector means.
- 15 8. A laser-radar receiver in accordance with any of claims 1 to 7 wherein said array forms a conformal array.
9. A laser-radar receiver in accordance with any of claims 1 to 7 wherein said
20 array forms a focal plane array.
10. A laser-radar receiver in accordance with any of claims 1 to 9 wherein said first ends of said optical fibres comprise means for selectively filtering the wavelength of laser energy transmitted to the detector means.

25

11. A laser-radar receiver in accordance with claims 1 to 10 wherein said array comprises a plurality of smaller individual arrays.

Fig.1.

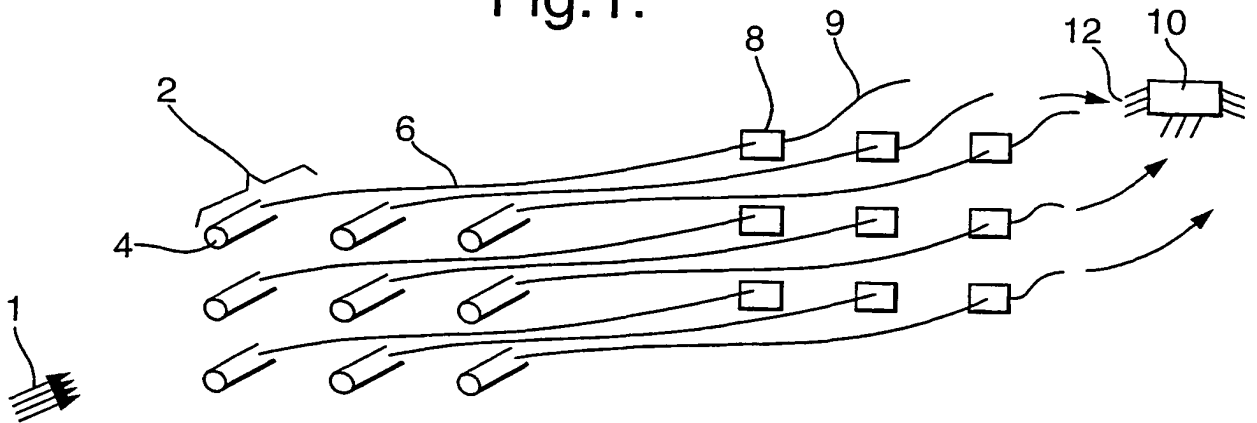


Fig.2.

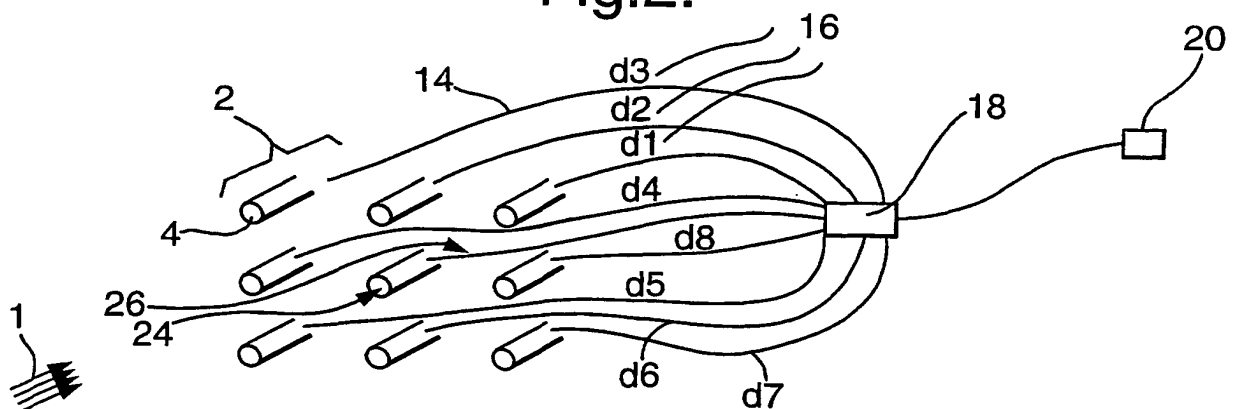


Fig.5.

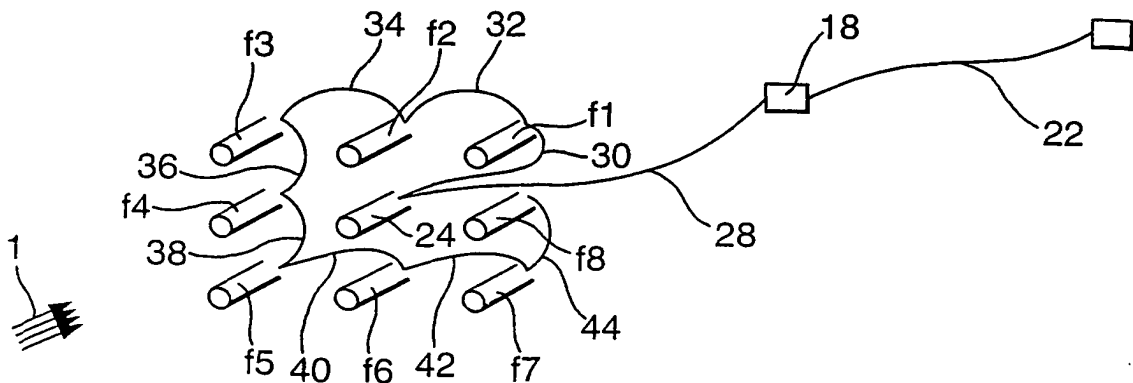


Fig.3.

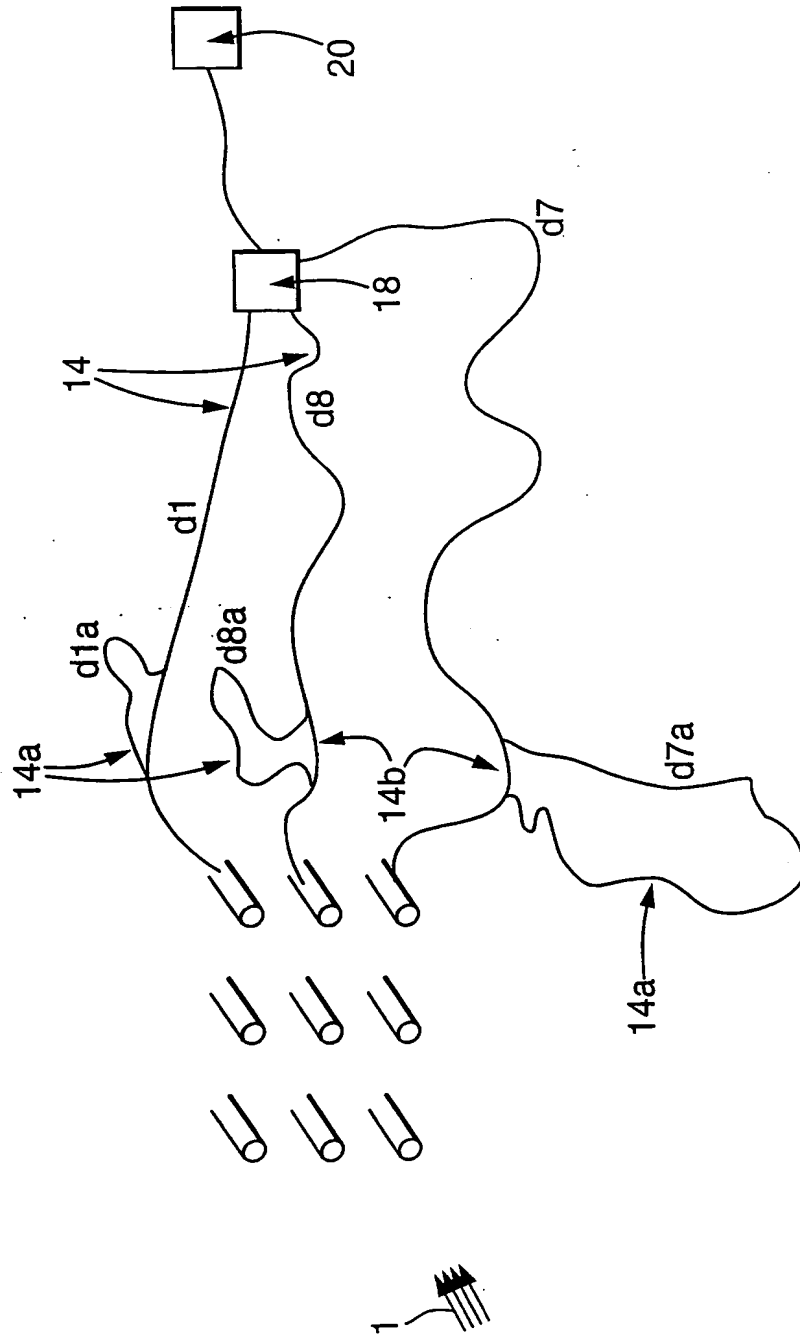


Fig.4a.


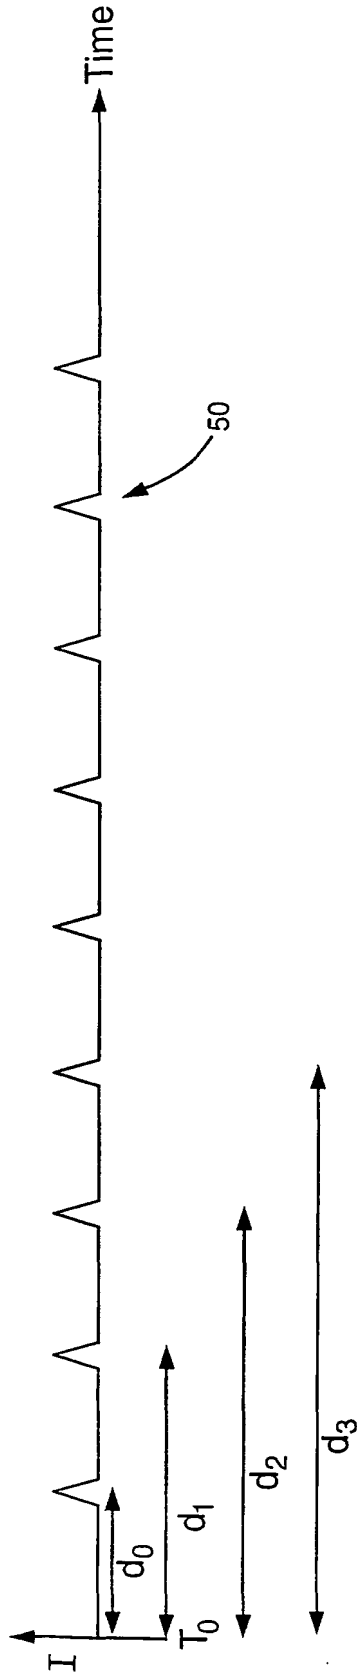


Fig.4b.

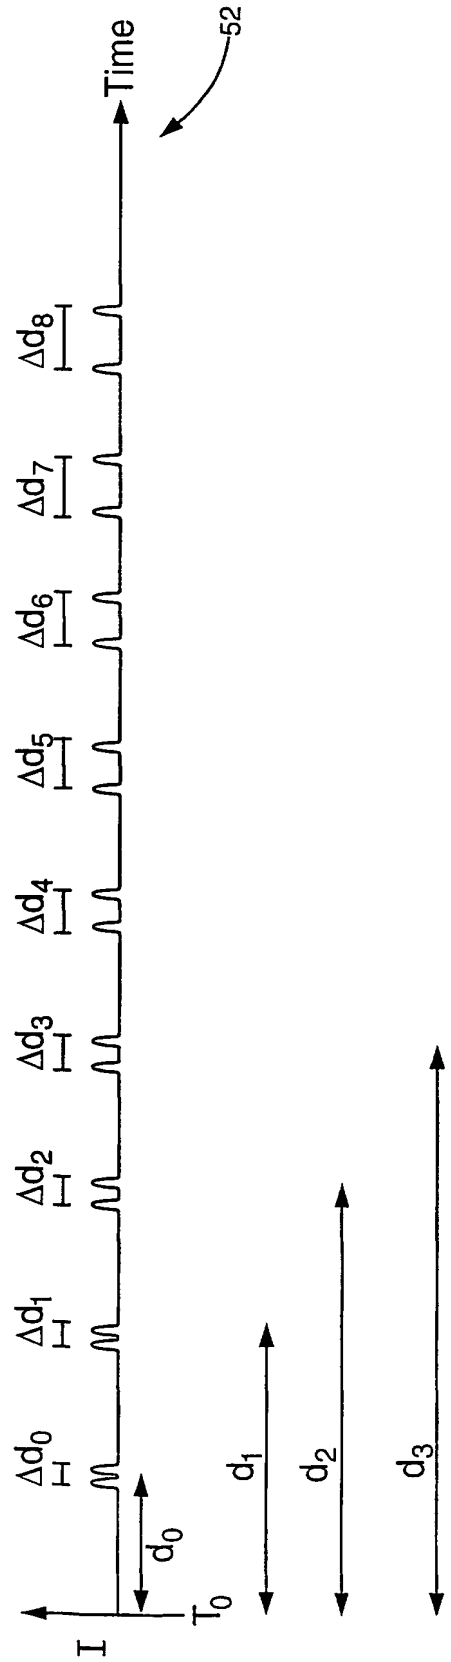

INTERNATIONAL SEARCH REPORT

Int Application No

PCT/GB 01/04375

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01S17/89 G01S7/486

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP 1 154 639 A (ELOP ELECTROOPTICS IND LTD) 14 November 2001 (2001-11-14) abstract; figures 2-4 column 1, line 11 -column 2, line 19 column 3, line 47 -column 5, line 3 ---	1,2,6,10
X,P	US 6 246 822 B1 (CASWELL ROBERT LYNN ET AL) 12 June 2001 (2001-06-12) abstract; figure 3 ---	1,2,6,10
X,P	US 6 163 372 A (GOAN ROBERT ET AL) 19 December 2000 (2000-12-19) abstract; figure 8 column 10, line 26 - line 67 --- -/--	1,2,6,10

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

20 December 2001

Date of mailing of the international search report

08/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Niemeijer, R

INTERNATIONAL SEARCH REPORT

Int

Application No

PCT/GB 01/04375

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 164 373 A (SCHUSS JACK J ET AL) 14 August 1979 (1979-08-14) abstract; figures 1,5 column 3, line 32 - line 61 column 5, line 33 - line 57 -----	1
A	US 5 760 852 A (HSU TSUNG-YUAN ET AL) 2 June 1998 (1998-06-02) abstract; figures 1,2 column 2, line 64 -column 3, line 23 -----	1
A	US 5 953 110 A (BURNS HOYT N) 14 September 1999 (1999-09-14) abstract; figures 2-4 column 3, line 27 - line 43 -----	1

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/GB 01/04375

Patent documents cited in search report		Publication date	Patent family member(s)	Publication date
EP 1154639	A	14-11-2001	EP 1154639 A1	14-11-2001
US 6246822	B1	12-06-2001	NONE	
US 6163372	A	19-12-2000	NONE	
US 4164373	A	14-08-1979	NONE	
US 5760852	A	02-06-1998	NONE	
US 5953110	A	14-09-1999	NONE	

Form: PCT/ISA/210 (patent family annex) (July 1992)



THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)